

ULTRASONIC CLEANING EQUIPMENT

[STANDARD EQUIPMENT & CUSTOMIZED SOLUTIONS]



INDUSTRIAL LINE

T | tierratech
ULTRASONIC CLEANING SYSTEMS

tierratech.com

USA





TABLE OF CONTENTS

01 TIERRATECH® ULTRASONIC CLEANING SYSTEMS. INDUSTRIAL LINE	4-5
02 APPLICATIONS BY SECTOR	6-9
03 CUSTOMIZED SOLUTIONS	10
SINGLE TANK CUSTOMIZED EQUIPMENT	10-11
CUSTOMIZED MANUAL, MULTI-TANK EQUIPMENT	12-13
CUSTOMIZED AUTOMATIC, MULTI-TANK EQUIPMENT (X/Y TRANSFER AND GALLOPING TRANSFER)	14-15
CUSTOMIZED HEAVY DUTY AUTOMATIC, MULTI-TANK EQUIPMENT (GANTRY CRANE)	16-17
04 STANDARD EQUIPMENT	18-20
05 GENERATORS AND ULTRASONIC EMITTERS	21
06 GENERATORS AND ULTRASONIC EMITTERS SETS	22
07 CLEANING PRODUCTS	23

TT TierraTech®
 Ultrasonic Cleaning Systems
 Industrial line
 2022





**ULTRASONIC CLEANING EQUIPMENT
INDUSTRIAL LINE**



WHO ARE WE?

TIERRATECH® IS A LEADER IN THE MANUFACTURE AND PROMOTE OF ULTRASONIC CLEANING EQUIPMENT AND SYSTEMS FOR MORE THAN 20 YEARS OF EXPERIENCE IN ULTRASONIC TECHNOLOGY.

OUR HIGHLY QUALIFIED TECHNICAL AND COMMERCIAL TEAM ALLOWS US TO PROVIDE A PERSONALIZED SERVICE AND ADVICE ACCORDING TO THE NEEDS OF EACH CUSTOMER

WHAT WE DO

TIERRATECH® OFFERS STANDARD ULTRASONIC CLEANING EQUIPMENT AND SYSTEMS OR TURNKEY PROJECTS THAT USES A COMBINATION OF ULTRASOUND, DETERGENT AND WATER TO PROVIDE IMPECCABLE CLEANING.

LARGE NATIONAL AND INTERNATIONAL COMPANIES IN THE NAVAL, AERONAUTICAL, AUTOMOTIVE, MOLDS, FOOD, SANITARY, GRAPHIC ARTS, ELECTRONICS, ENERGY, COSMETICS, AND MANY OTHER INDUSTRIES, TRUST OUR INDUSTRIAL LINE WITH STANDARDIZED OR CUSTOMIZED EQUIPMENT, MANUAL OR COMPLETELY AUTOMATED, SPECIALLY DESIGNED FOR THE CLEANING OF THEIR PARTS AND IMPROVING THEIR PRODUCTION PROCESSES.

We provide solutions, which is why we have an effective R+D+I team that continuously works with new technologies and applications in the ultrasonic cleaning environment, incorporating state-of-the-art components and materials, an agile design and a customized project execution.

Tierratech® complies with the highest quality standards in all our processes. Our Quality Management System is ISO 9001:2008 by TÜV Rheinland with registration number 0.04.09057.



TIERRATECH® WORLDWIDE

TierraTech® is located in Spain, USA, Mexico, France and Germany; Countries where we design, manufacture and distribute. In addition with our subsidiaries, we have an extensive distribution network in over 40 countries all over the world, offering commercial and technical support to all our customers worldwide.

TIERRATECH® IN MEXICO

Celaya (Guanajuato)
mexico@tierratech.mx

TIERRATECH® IN SPAIN

Guarnizo (Cantabria)
tierratech@tierratech.com

TIERRATECH® IN THE USA


McAllen (Texas)
sales@tierratech.com

TIERRATECH® IN FRANCE

Mérignac (Bordeaux)
contact@tierratech.com

TIERRATECH® IN GERMANY

Troisdorf (Köln)
deutschland@tierratech.com

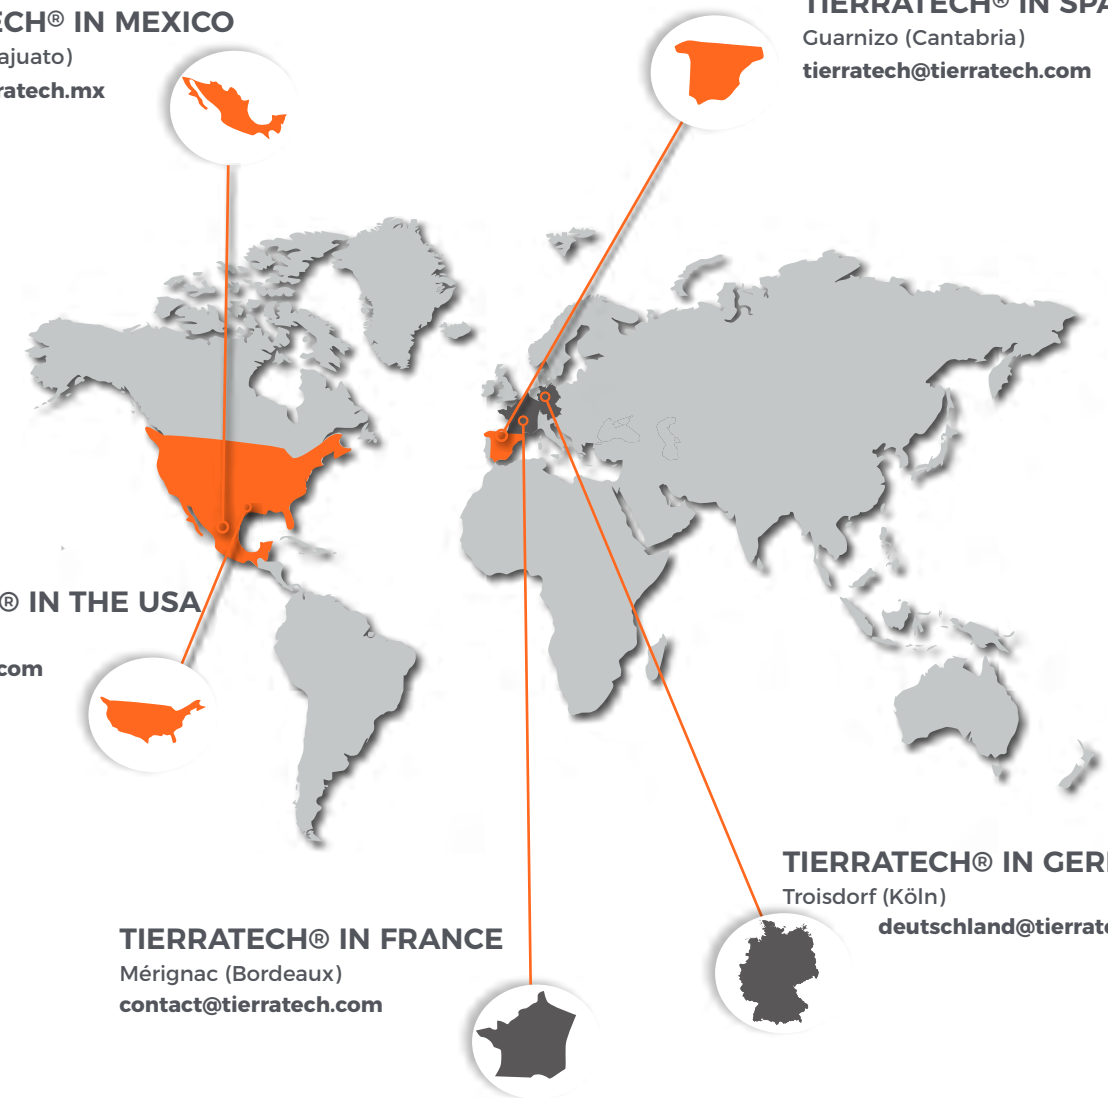

WE PROVIDE SOLUTIONS

1 SUPPORT

TierraTech's® highly qualified technical and commercial team provides personalized support according to the needs of each client to offer the best service every day from the production process to after-sales.

2 PROPER EQUIPMENT

With an immediate delivery time for standard equipment and an agile design and development for custom equipment, you will have the most advanced and efficient ultrasonic cleaning technology in your facilities.

3 TECHNICAL SUPPORT

We have our own technical department with extensive experience, capable of resolving any incident in the shortest possible time, and thus guaranteeing the reliability of our customers' equipment, as well as the trust they have placed in us.

ADVANTAGES OF ULTRASONIC CLEANING

ULTRASONIC CLEANING HAS BEEN ESTABLISHED OVER THE LAST FEW YEARS AS THE BEST CLEANING METHOD IN THE INDUSTRY. THIS SYSTEM IS THE MOST EFFECTIVE FOR KEEPING PARTS IN PERFECT CONDITION, SAVING PRODUCTION TIME AND ACHIEVING A HIGH LEVEL OF QUALITY IN THE FINAL PRODUCT.



HIGH-QUALITY CLEANING



REDUCES LABOUR TIME, BY 80%, BENEFITING OTHER TASKS IN THE PRODUCTION PROCESS



REDUCES ENERGY COSTS



SAVINGS IN WATER AND CLEANING PRODUCTS BY IMMERSION CLEANING



TECHNOLOGY IS CLEANER AND MORE ENVIRONMENTALLY FRIENDLY



TIERRATECH® GUARANTEE

APPLICATIONS BY SECTOR

AUTOMOTIVE INDUSTRY

At TierraTech® we are backed by extensive experience in supplying standard and customized equipment for the automotive industry and its auxiliaries. Depending on the application and the number of pieces to be washed, the standard equipment or the customized equipment suitable for the needs of the client will be recommended.



AERONAUTICS INDUSTRY

The precision of ultrasonic cleaning helps both component manufacturers and MRO centers meet the stringent quality demands and strict industry safety standards. Tierratech® equipment is essential for cleaning hydraulic systems, heat exchangers, engine parts, injection pumps, blades, etc., as they do not damage materials and do not modify their geometry or dimensions.



GRAPHICS INDUSTRY

Ultrasonic cleaning systems are used for cleaning anilox rollers and sleeves, printing plates, inkwells, ceramic rollers and other removable printing parts with greasy, water-based, alcohol-based or UV ink build-up. Ultrasonic cleaning recovers the transfer level of the anilox roller cavities (cell volume recovery) and also on gravure cylinders of all sizes. TierraTech® equipment helps to maintain high print quality.




MOLD SECTOR INDUSTRY

Washing by immersion in our ultrasonic tanks is an effective and quality solution for cleaning all types of injection molds, that is, plastic, rubber, rubber-metal, aluminum injection, zamac, etc., since with its use, production times are optimized. It allows to obtain a total cleaning of the mold without the need to disassemble the piece and without damaging the materials. For this reason, it represents the most effective alternative to traditional cleaning systems.



SURFACE TREATMENT AND ELECTROPLATING

Ultrasonic pre-cleaning or part cleaning saves a great deal of time and labor, as it eliminates manual cleaning and long immersion times required by traditional washing methods. Quickly and effectively removes polishing paste, grease and dirt of all kinds on metal and plastic parts, reaching all hard-to-reach areas.

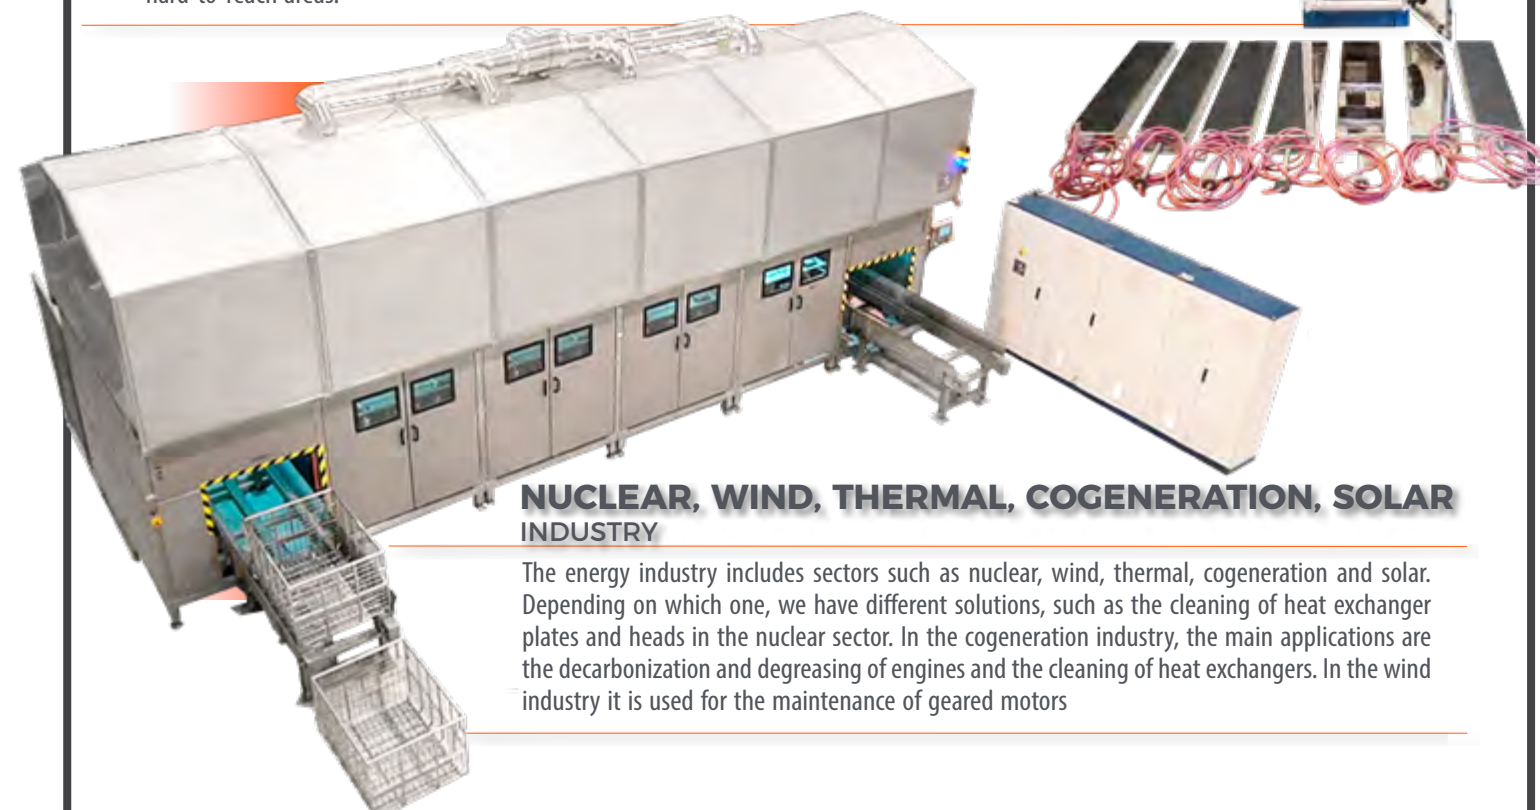

NUCLEAR, WIND, THERMAL, COGENERATION, SOLAR INDUSTRY

The energy industry includes sectors such as nuclear, wind, thermal, cogeneration and solar. Depending on which one, we have different solutions, such as the cleaning of heat exchanger plates and heads in the nuclear sector. In the cogeneration industry, the main applications are the decarbonization and degreasing of engines and the cleaning of heat exchangers. In the wind industry it is used for the maintenance of geared motors

FOOD INDUSTRY

Our equipment is suitable for the removal of oil, greasy dirt, residues and calcareous deposits. With the recommended ultrasonic system, we achieve a cleaning that is far superior to traditional methods, being a guarantee in the maintenance of equipment and tools in an industry with such high hygienic requirements.

PHARMACEUTICAL AND LABORATORY INDUSTRY

TierraTech® is present in the pharmaceutical industry. Our ultrasonic equipment is used to remove traces of chemical products, oils, pigments or fingerprints, among other residues.

We remove dirt from complex parts with cracks, difficult access or joints without damaging them. Ultrasound equipment achieves a high quality of cleaning and saves time and effort compared to manual washing.

ELECTRONICS INDUSTRY

Electronic applications are used on printed circuit boards and electronic components to remove weld residues, dust, grease and other contaminants that diminish their performance.

We achieve high quality cleaning in hard-to-reach areas or blind holes and gentle on delicate welded joints and small parts. After the ultrasonic cleaning process, electronic components improve their effectiveness and improve SIR test results.

BEFORE AND AFTER, PRINTED CIRCUIT BOARD CLEANING

MACHINING AND TURNING

Ultrasonic cleaning is the most effective solution in the industrial process of bar turning and machining. It is an excellent solution for cleaning and removing residues such as chips, traces of grease, rust, etc.

Our systems are being implemented in all subsectors of machining and bar turning in the automotive auxiliary industry, connectors, fittings, medical implants/prosthesis, etc.

MARINE INDUSTRY

In the marine industry, ultrasonic cleaning is applied in construction, renovation and maintenance, as well as oil drilling platforms and offshore/wind power generation platforms. Our cleaning equipment can also be used to work on different types of vessels or container, thus expanding the scope of maintenance in a variety of places and conditions.

Ultrasonic cleaning systems are used both for cleaning heat exchangers, cylinder heads, turbos, intercoolers, tubular bundles or propellers as well as for other parts with accumulation of rust, grease and oil, paint, varnish, lubricant, sediment or carbon among others.

BEFORE AND AFTER, CYLINDER HEAD AND CYLINDER LINERS

INDUSTRIAL MAINTENANCE

The harsh working conditions to which this type of machinery is subjected, make preventive maintenance a fundamental task to extend its useful life and for its proper functioning.

Our ultrasonic cleaning equipment facilitates the cleaning of chains, reducers, solenoid valves, transmissions or hydraulic units, heat exchangers, filters, etc., thus helping with correct maintenance that favors the efficient work of the machinery and reduces the possibility and risk of unforeseen breakdowns.

SOME OF OUR CLIENTS



CUSTOMIZED SOLUTIONS

CUSTOMIZED EQUIPMENT

Single-Tank, Customized Equipment


Manual Multi-Tank, Customized Equipment

Automatic Multi-Tank, Customized Equipment — with loadig system

X/Y TRANSFER

GALLOPANT TRANSFER

GANTRY CRANE

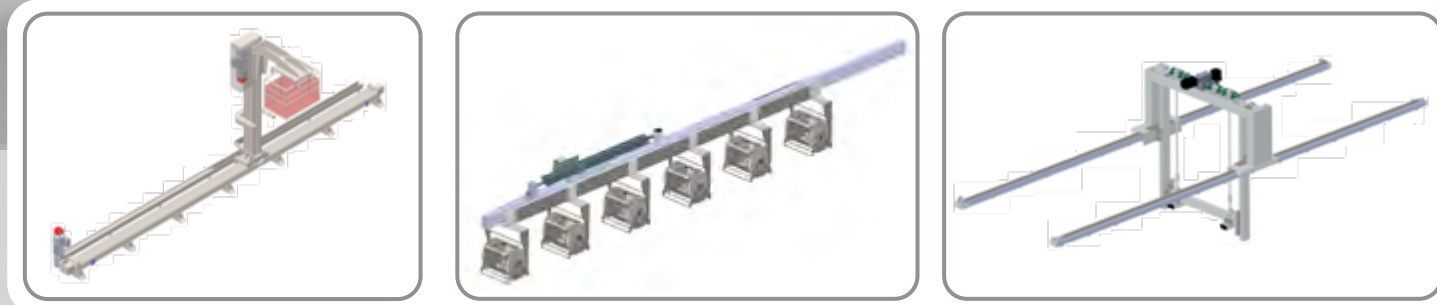

SINGLE TANK, CUSTOMIZED EQUIPMENT

TIERRATECH® OFFERS CUSTOMIZED EQUIPMENT THAT SOLVES OUR CUSTOMERS' CLEANING NEEDS IN ANY APPLICATION IN THE INDUSTRIAL SECTOR. THE DIMENSIONS OF THE EQUIPMENT OF A TANK VARY FROM THOSE THAT ONLY REQUIRE SMALL CAPACITIES TO THE MANUFACTURE OF LARGE EQUIPMENT FOR THE NAVAL, ELECTRO-TECHNICAL, NUCLEAR INDUSTRY, ETC.



SINGLE TANK TT-350N

Customized single tank equipment designed and manufactured for cleaning molds for the manufacture of batteries in the energy sector. It includes a retention tank and a drainage pump with manifold and manual valve for emptying the tank.

USEFUL MEASURES: 26x24x24 IN
INTERNAL MEASURES: 29x28x34 IN
CAPACITY: 121 GAL



SINGLE TANK TT-2900N

Specially manufactured single tank with a 3000 liter (800 gal) capacity. Designed for tire stripping, it has a tank made of AISI 304L stainless steel with a sloping bottom to guarantee the correct collection and evacuation of sludge. A manual press-type filtering system with 30 plates has been added to this equipment, which helps to separate the liquid remains from the solid with the greatest efficiency.

USEFUL MEASURES: 129x24x40 IN
INTERNAL MEASURES: 134x28x52 IN
CAPACITY: 800 GAL



SINGLE TANK TT-3300N

Ultrasonic cleaning equipment with 1 tank of approximately 3,300 liters (870 gal) capacity with automatic heat-insulated lid, manufactured for cleaning coolers in the naval sector.

USEFUL MEASURES: 47x47x67 IN
INTERNAL MEASURES: 51x51x81 IN
CAPACITY: 870 GAL



SINGLE TANK TT-400AC

Customized 400 liter (105 gal) capacity manual single tank with external stainless steel paneling and inclined tank bottom for proper cleaning and hot rinsing with spinners and filter discs for the removal of plastic and polymer components.

USEFUL MEASURES: 157x8x20 IN
INTERNAL MEASURES: 157x8x24 IN
CAPACITY: 105 GAL





WE DESIGN CUSTOMIZED TO THE REQUIREMENTS OF EACH CUSTOMER, SUPPORT STRUCTURES FOR WASHING PARTS, SUCH AS BASKETS, SPECIAL RACKS AND FRAMES WITH THE POSSIBILITY OF BATTING, INCLINATION OR ROTATING SYSTEMS.

MANUAL, MULTI-TANK CUSTOMIZED EQUIPMENT

THIS EQUIPMENT IS DESIGNED FOR COMPANIES WITH SPECIAL CLEANING NEEDS, EITHER DUE TO THE CHARACTERISTICS OF THE PARTS TO BE CLEANED OR DUE TO THE NEEDS OF THEIR MANUFACTURING PROCESS. THEY MAY INCORPORATE VARIOUS PROCESSES SUCH AS RINSING, DRYING OR DIFFERENT TREATMENTS IN ADDITION TO CLEANING. FROM THE BEGINNING, WE WORK HAND IN HAND WITH OUR CUSTOMER TO FIND SPECIFIC SOLUTIONS THAT BEST FIT THEIR NEEDS BELOW ARE SOME EXAMPLES OF CUSTOMIZED EQUIPMENT DEVELOPED TO SPECIFICATION FOR OUR CUSTOMERS' NEEDS.



MULTI TANK MANUAL TT-150NC

Customized manual multi-tank equipment for cleaning parts in a process of 6 tanks, ultrasonic, hot rinsing, cold rinsing and drying, with loading and unloading areas arranged in two sections with an angle of 90° between them.



USEFUL MEASURES: 19x15x14 IN
INTERNAL MEASURES: 27x17x23 IN
CAPACITY: 40 GAL



MULTI TANK MANUAL TT-3x150N

Multi-stage, manual, tri-tank for the medical-pharmaceutical sector with ultrasonic tank, hot rinsing tank and drying tank with pneumatic lifting platform for loading and immersing parts in baskets with a maximum lifting capacity of 60 kg (132 lb).



USEFUL MEASURES: 25x16x13 IN
INTERNAL MEASURES: 27x19x24 IN
CAPACITY: 50 GAL



MULTI TANK MANUAL TT-3x150N

Manual, ultrasonic cleaning equipment with three tanks having an approximate capacity of 195 litres (51 gal). For the transport and immersion of the steel molds to be cleaned, it has 6 baskets with an upper anchoring system for loading - draining - unloading parts, built with rod and plates of SAE 304 stainless steel.



USEFUL MEASURES: 22x16x16 IN
INTERNAL MEASURES: 25x19x29 IN
CAPACITY: 51 GAL



MULTI TANK MANUAL TT-5x150N

Manual, multi-tank for cleaning parts and components in the aeronautical sector. The equipment is made up of 5 tanks: ultrasonic cleaning, hot ultrasonic rinsing, 2 hot rinsing tanks and a cold treatment tank.



USEFUL MEASURES: 20x16x16 IN
INTERNAL MEASURES: 23x19x29 IN
CAPACITY: 50 GAL



MULTI TANK MANUAL TT-2x600N

Manual double tank equipment with ultrasonic cleaning tank and hot ultrasonic rinsing tank, incorporates a pneumatic lifting platform for loading and immersion of the pieces, built in AISI 304 stainless steel, with a maximum load capacity of 500 Kg. (1,100 lb) The equipment integrates a waterflow system, a tank independent of the cleaning tank for capturing oils and particles in the main tank's surface.



USEFUL MEASURES: 16x16x63 IN
INTERNAL MEASURES: 23x23x77 IN
CAPACIDAD: 189 GAL



CUSTOMIZED AUTOMATIC MULTI-TANK EQUIPMENT

SINCE THE QUALITY AND QUANTITY REQUIREMENTS OF THE PIECES TO BE WASHED VARY, EACH CLEANING SYSTEM IS MADE TAKING IN CONSIDERATION THE PRODUCTION AND CHARACTERISTICS OF THE PIECES TO BE WASHED ACCORDINGLY.

OUR ULTRASONIC LINE IS COMPLETELY AUTOMATED AND MANUFACTURED TO MEET THE HIGHEST INDUSTRIAL CLEANING REQUIREMENTS AND ALSO MEETS THE DEMANDS AND STANDARDS OF OUR CLIENTS.

- X/Y TRANSFER -

The automatic multi tank equipment incorporates a loading system of up to 100Kg (220 lb) for the displacement of baskets, racks and rotating drums in different working positions, with horizontal and vertical movements of variable speed. The type of transfer varies depending on the need for loading and immersion of the parts to be cleaned.



MULTI TANK AUTOMATIC TT-3x150

Customized automatic multi-stage, 3 tank equipment: ultrasonic cleaning, hot rinsing and drying, and tables for loading and unloading, for the baskets containing the parts to be cleaned. Specially designed for washing material from the medical-health sector. It integrates Waterflow System, independent tank of the cleaning tank for capturing oils and particles on the surface of the main tank plus a filtering system TTF1.



USEFUL MEASURES: 24x15x13 IN
INTERNAL MEASURES: 27x19x25 IN
CAPACITY: 47 GAL

MULTI TANK AUTOMATIC TT-3x260

Modular ultrasonic cleaning system with automated lateral transfer for cleaning steel discs for the food sector. It integrates 3 tanks with a useful capacity of 260 liters (70 gal) each: ultrasonic tank + rinse tank in cold water by sprinkler + compressed air drying tank. The assembly has a security enclosure with light aluminum profile and steam extraction system.



USEFUL MEASURES: 26x13x17 IN
INTERNAL MEASURES: 31x16x31 IN
CAPACITY: 69 GAL

MULTI TANK AUTOMATIC CUSTOMIZED INSTALLATION

Customized installation manufactured for an automatic ultrasonic cleaning and degreasing line for medical instruments. It has been designed in the smallest and most compact way possible, according to customer requirements, separated into 3 different stages, US+2AF in one zone, AC in another area and vacuum drying in another area, automated in 2 zones with loading and unloading and manual drying.



USEFUL MEASURES: 16x14x19 IN
INTERNAL MEASURES: 16x14x24 IN
CAPACITY: 18 GAL

- GALLOPING TRANSFER -

In the automatic equipment that incorporates this horizontal loading system, all the tanks are working at the same time. The transfer moves on the horizontal axis continuously loading the baskets that will be introduced and emerging from the tank with a vertical movement by means of a pneumatic platform.



MULTI TANK AUTOMATIC TT-250 US+AC+AS CON US+AC+S

Modular automatic ultrasonic cleaning system of 5 tanks with a useful capacity of 250 liters (66 gal) each. Integrates: ultrasonic tank + hot rinse tank + hot rinse tank with ultrasound + hot rinse tank + drying tank + loading and unloading area. 15 rotating drums are included that will house the parts to be cleaned and will rotate in line in an automated way during the cleaning process with the help of a transfer of 1 galloping axis.



USEFUL MEASURES: 18x16x18 IN
INTERNAL MEASURES: 27x20x27 IN
CAPACITY: 66 GAL

MULTI TANK AUTOMATIC TT-7x500

Automatic multi-tank installation for cleaning of components of the industrial sector with 7 tanks of 625 liters (165 gal) of capacity each. 2 ultrasonic tanks + 3 for rinsing and 2 for drying. The loading and unloading system is a galloping transfer composed of carriages joined together, so that the thrust of the pneumatic actuator is transmitted from one to the other.



USEFUL MEASURES: 20x30x8 IN
INTERNAL MEASURES: 29x39x37 IN
CAPACITY: 125 GAL



- GANTRY CRANE -

Loading of parts that exceed 100 kg (220 lb) in weight already requires this type of manipulator that we build with carbon steel beams and structural aluminum for the automatic movement of the basket or racks in different working positions with horizontal and vertical movements of variable speed. The automatic equipment that incorporates a gantry trolley is custom-made for large weight and volume parts that need high quality cleaning processes. They are designed according to the needs of the client and are very robust and functional equipment of the latest generation.



HEAVY EQUIPMENT
MULTI TANK
AUTOMATIC

Special automatic installation for cleaning parts in the automotive sector with a 4-tank multistage ultrasonic cleaning line: Hot rinsing + ultrasonic cleaning + hot rinsing + drying. In this case the loading and unloading area to optimally adapt to the functionality of the equipment, has been designed in front arrangement and the installation has been fully faired with folding security windows that allow access to the interior of the equipment



USEFUL MEASURES: 52x52x30 IN
INTERNAL MEASURES: 59x59x42 IN
CAPACITY: 528 GAL

HEAVY EQUIPMENT
MULTI TANK
AUTOMATIC

CUSTOMIZED SYSTEM
US+AC



USEFUL MEASURES: 94x39x39 IN
INTERNAL MEASURES: 100x44x55 IN
CAPACITY: 885 GAL


Special automated equipment with 2 tanks of 3,350 liters (885 gal) of capacity for degreasing large parts in the automotive sector. It has an ultrasonic cleaning tank + hot rinse tank + loading and unloading area. In addition to a security enclosure to prevent access to hazardous areas while the machine is running, but easily removable for maintenance work. It has an integrated steam suction system in both tanks with droplet separator.



HEAVY EQUIPMENT
MULTI TANK
AUTOMATIC

AUTOMATIC
TT-7X11000

Large fully automated multi-tank installation of 7 tanks with 11,000 liters (2906 gal) of capacity each for cleaning heat exchanger plates in the industrial sector. The line of tanks has been arranged from left to right to follow the washing process as follows: Hot rinsing + ultrasonic cleaning + hot rinsing (1) + hot rinsing (2) + hot rinsing (3) + ultrasonic cleaning + hot rinsing. The gantry carriage incorporates a passive suction system.

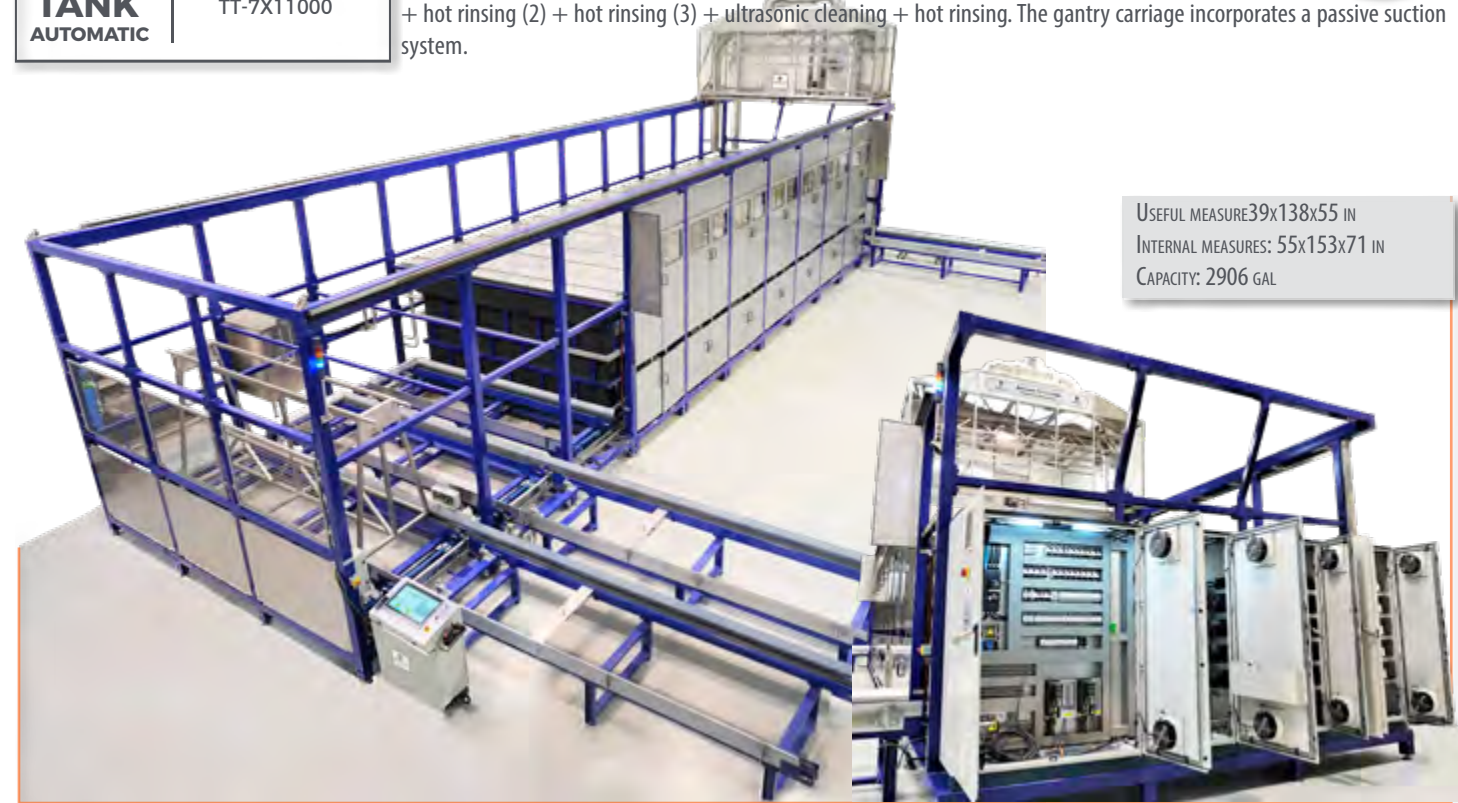

USEFUL MEASURE 39x138x55 IN
INTERNAL MEASURES: 55x153x71 IN
CAPACITY: 2906 GAL

HEAVY EQUIPMENT
MULTI TANK
AUTOMATIC

TT-5x1850 US+CR+US
(ACID)+HR+D

Ultrasonic cleaning installation of 5 tanks with a capacity of 2,150 liters (568 gal) each for the automotive sector. The cleaning process is carried out in this case from left to right according to the customer's requirements with a gantry crane loading system to handle racks that transport parts up to 600 kg. The 5 tanks are arranged between the loading and unloading areas: Ultrasonic cleaning+cold rinsing+Ultrasonic cleaning+hot rinsing+drying tank.



USEFUL MEASURES: 90 x 16x 48 IN
INTERNAL MEASURES: 98 x 24 x 56 IN
CAPACITY: 568 GAL

STANDARD EQUIPMENT

30 LITERS (8 GAL) TO 8.000 LITERS (2113 GAL)

THE INDUSTRIAL STANDARD EQUIPMENT INCLUDES MODULAR EQUIPMENT SPECIALLY DESIGNED FOR CLEANING, DEGREASING AND DESCALING OF ALL TYPES OF PARTS, COMPONENTS AND ACCESSORIES.

ALL THE EQUIPMENT IN THIS LINE, FROM 75 LITERS (20 GAL) UPWARDS, CAN INCORPORATE A PNEUMATIC ELEVATING PLATFORM TO FACILITATE THE LOADING AND UNLOADING OF PARTS. ALL OF THEM INCORPORATE FILTERING, OIL SEPARATION AND WATER TREATMENT SYSTEMS, AMONG OTHERS, TO FACILITATE AND PROVIDE THE BEST SOLUTION FOR THE INDUSTRIAL SECTOR.



- **Capacity:** 6.6 gallons
- **Internal dimensions:** 22" x 12" x 10" in
- **Useful measurements:** 20" x 10" x 7" in
- **External measurements:** 28" x 16" x 20" in
- **Power Supply:** 240V
- **Heating element:** 700W
- Ultrasonic generator with an output power of 600Wp (1200Wp-p)
- **Ultrasonic power:** 600W (1200Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 12 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 75 Lb

TT-30



- **Capacity:** 11 gallons
- **Internal dimensions:** 24" x 12" x 12" in
- **Useful measurements:** 22" x 10" x 9" in
- **External measurements:** 31" x 17" x 21" in
- **Power Supply:** 240V
- **Heating element:** 900W
- Ultrasonic generator with an output power of 700Wp (1400Wp-p)
- **Ultrasonic power:** 700Wp (1400W p-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 14 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 88 Lb

TT-50



- **Capacity:** 16 gallons
- **Internal dimensions:** 28" x 14" x 16" in
- **Useful measurements:** 26" x 12" x 11" in
- **External measurements:** 42" x 23" x 35" in
- **Power Supply:** 240V
- **Heating element:** 1350W
- Ultrasonic generator with an output power of 800Wp (1600Wp-p)
- **Ultrasonic power:** 800Wp (1600Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 16 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 156 Lb

TT-75



- **Capacity:** 16 gallons
- **Internal dimensions:** 26" x 15" x 19" in
- **Useful measurements:** 24" x 13" x 11" in
- **External measurements:** 50" x 29" x 36" in
- **Power Supply:** 240V
- **Heating element:** 2250W
- Ultrasonic generator with an output power of 1000Wp (2000Wp-p)
- **Ultrasonic power:** 1000Wp (2000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 16 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 286 Lb

TT-75N



- **Capacity:** 33 gallons
- **Internal dimensions:** 28" x 19" x 21" in
- **Useful measurements:** 26" x 16" x 14" in
- **External measurements:** 53" x 32" x 37" in
- **Power Supply:** 240V/400V
- **Heating element:** 3750W
- Ultrasonic generator with an output power of 2000Wp (4000Wp-p)
- **Ultrasonic power:** 2000W (4000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 385 Lb

TT-150N



- **Capacity:** 66 gallons
- **Internal dimensions:** 35" x 24" x 25" in
- **Useful measurements:** 34" x 23" x 15" in
- **External measurements:** 64" x 40" x 41" in
- **Power Supply:** 400V
- **Heating element:** 7500W
- Ultrasonic generator with an output power of 4000Wp (8000Wp-p)
- **Ultrasonic power:** 4000Wp (8000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 606 Lb

TT-300N



- **Capacity:** 88 gallons
- **Internal dimensions:** 43" x 24" x 27" in
- **Useful measurements:** 42" x 21" x 17" in
- **External measurements:** 72" x 40" x 43" in
- **Power Supply:** 400V
- **Heating element:** 7500W
- Ultrasonic generator with an output power of 4000Wp (8000Wp-p)
- **Ultrasonic power:** 4000Wp (8000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 705 Lb

TT-400N



- **Capacity:** 132 gallons
- **Internal dimensions:** 51" x 29" x 26" in
- **Useful measurements:** 48" x 26" x 17" in
- **External measurements:** 81" x 47" x 42" in
- **Power Supply:** 400V
- **Heating element:** 9000W
- Ultrasonic generators with an output power of 6000Wp (12000Wp-p)
- **Ultrasonic power:** 6000Wp (12000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 771 Lb

TT-600N



- **Capacity:** 264 gallons
- **Internal dimensions:** 59" x 32" x 34" in
- **Useful measurements:** 56" x 28" x 23" in
- **External measurements:** 115" x 55" x 43" in
- **Power Supply:** 400V
- **Heating element:** 14000W
- Ultrasonic generators with an output power of 8000Wp (16000Wp-p)
- **Ultrasonic power:** 8000Wp (16000Wp-p)
- **Working frequency:** 40 KHz sweep system ± 2%
- 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
- Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
- **Weight:** 1212 Lb

TT-1000N



- TT-2000N**
- **Capacity:** 440 gallons
 - **Internal dimensions:** 69" x 40" x 43" in
 - **Useful measurements:** 65" x 36" x 31" in
 - **External measurements:** 130" x 65" x 53" in
 - **Power Supply:** 400V
 - **Heating element:** 18000W
 - Ultrasonic generators with an output power of 12000Wp (24000Wp-p)
 - **Ultrasonic power:** 12000Wp (24000Wp-p)
 - **Working frequency:** 40 KHz sweep system $\pm 2\%$
 - 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
 - Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
 - **Weight:** 2755 Lb



- TT-3000N**
- **Capacity:** 660 gallons
 - **Internal dimensions:** 81" x 47" x 47" in
 - **Useful measurements:** 76" x 43" x 35" in
 - **External measurements:** 145" x 71" x 58" in
 - **Power Supply:** 400V
 - **Heating element:** 24000W
 - Ultrasonic generators with an output power of 16000Wp (32000Wp-p)
 - **Ultrasonic power:** 16000Wp (32000Wp-p)
 - **Working frequency:** 40 KHz sweep system $\pm 2\%$
 - 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
 - Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
 - **Weight:** 4078 Lb



- TT-4000N**
- **Capacity:** 880 gallons
 - **Internal dimensions:** 94" x 59" x 50" in
 - **Useful measurements:** 90" x 54" x 35" in
 - **External measurements:** 164" x 89" x 61" in
 - **Power Supply:** 400V
 - **Heating element:** 30000W
 - Ultrasonic generators with an output power of 24000Wp (48000Wp-p)
 - **Ultrasonic power:** 24000Wp (48000Wp-p)
 - **Working frequency:** 40 KHz sweep system $\pm 2\%$
 - 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
 - Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
 - **Weight:** 6172 Lb



- TT-8000**
- **Capacity:** 2113 gallons
 - **Internal dimensions:** 118" x 79" x 59" in
 - **Useful measurements:** 110" x 71" x 46" in
 - **External measurements:** 157" x 104" x 71" in
 - **Power Supply:** 400V
 - **Heating element:** 60000W
 - Ultrasonic generators with an output power of 40000Wp (80000Wp-p)
 - **Ultrasonic power:** 40000Wp (80000Wp-p)
 - **Working frequency:** 40 KHz sweep system $\pm 2\%$
 - 34 PZT (lead zirconate titanate) piezo-electric transducers with aluminium alloy body
 - Tank built in INOX AISI 316 Stainless steel, 0,08" inch thick
 - **Weight:** 7716 Lb

IMMEDIATE DELIVERY



ULTRASONIC GENERATORS

GENERATOR SB-2K-D



- AVAILABLE POWERS:** from 1000W to 2000W with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to ± 1.5 KHz)
40KHz (With sweep system up to ± 1.5 KHz)
40-90KHz (With sweep system up to ± 1.5 KHz)
- OPERATING SYSTEM:**
- 3.5" TFT color display with access to power change and basic settings.
 - Normal: Working point tracking, with three modes available.
 - Sweep System: Up to ± 1.5 KHz frequency and speed modulation (adjustable parameters in model with display).
 - Burst System: Amplitude and speed modulation (adjustable parameters on display model).
 - Degas System: Degassing mode (adjustable between three modes in model with display)
 - Ext Control: Ultrasonic ON/OFF, sweep ON/OFF, burst ON/OFF, degas ON/OFF and RS-485 communication.

GENERATOR SB-2K-L



- AVAILABLE POWERS:** from 1000W to 2000W with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to ± 1.5 KHz)
40KHz (With sweep system up to ± 1.5 KHz)
40-90KHz (With sweep system up to ± 1.5 KHz)
- OPERATING SYSTEM:**
- Power control from 10% to 100% on the front panel indicated with multicolor LED bar.
 - Normal: Working point tracking, with three modes available.
 - Sweep System: Up to ± 1.5 KHz frequency and speed modulation (adjustable parameters in model with display).
 - Burst System: Amplitude and speed modulation (adjustable parameters on display model).
 - Degas System: Degassing mode (adjustable between three modes in model with display)
 - Ext Control: Ultrasonic ON/OFF, sweep ON/OFF, burst ON/OFF, degas ON/OFF and RS-485 communication.

GENERATOR SB-4K-D



- AVAILABLE POWERS:** from 2000Wp to 4000Wp, with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to ± 1.5 KHz)
40KHz (With sweep system up to ± 1.5 KHz)
40-90KHz (With sweep system up to ± 1.5 KHz)
- OPERATING SYSTEM:**
- 3.5" TFT color display with access to power change and basic settings.
 - Normal: Working point tracking, with three modes available.
 - Sweep System: Up to ± 1.5 KHz frequency and speed modulation (adjustable parameters in model with display).
 - Burst System: Amplitude and speed modulation (adjustable parameters on display model).
 - Degas System: Degassing mode (adjustable between three modes in model with display)
 - Ext Control: Ultrasonic ON/OFF, sweep ON/OFF, burst ON/OFF, degas ON/OFF and RS-485 communication.

GENERATOR SB-4K-L



- AVAILABLE POWERS:** from 2000Wp to 4000Wp, with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to ± 1.5 KHz)
40KHz (With sweep system up to ± 1.5 KHz)
40-90KHz (With sweep system up to ± 1.5 KHz)
- OPERATING SYSTEM:**
- Power control from 10% to 100% on the front panel indicated with multicolor LED bar.
 - Normal: Working point tracking, with three modes available.
 - Sweep System: Up to ± 1.5 KHz frequency and speed modulation (adjustable parameters in model with display).
 - Burst System: Amplitude and speed modulation (adjustable parameters on display model).
 - Degas System: Degassing mode (adjustable between three modes in model with display)
 - Ext Control: Ultrasonic ON/OFF, sweep ON/OFF, burst ON/OFF, degas ON/OFF and RS-485 communication.

GENERATOR SB - 10



- AVAILABLE POWERS:** from 1000Wp to 1700Wp, with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to $\pm 2\%$)
40KHz (Sweep System $\pm 2\%$)
40-90KHz (Sweep System $\pm 2\%$)
- OPERATING SYSTEM:**
- Normal: Working point tracking, with three modes available.
 - Burst: Amplitude modulation (adjustment set)
 - Sweep System $\pm 2\%$: Frequency Modulation (adjustment set)
 - Ext control: ultrasonic ON/OFF by contact.

GENERATOR SB - 30





- AVAILABLE POWERS:** from 2000Wp to 3400Wp, with automatic power tracking, and optimum working point tracking, with three tracking modes, anti-stationary wave and anti-wave system in the tank.
- AVAILABLE FREQUENCIES:** 28KHz (With sweep system up to $\pm 2\%$)
40KHz (With sweep system up to $\pm 2\%$)
40-90KHz (With sweep system up to $\pm 2\%$)
- OPERATING SYSTEM:**
- Normal: Frequency wave tracking
 - Burst: Amplitude modulation (adjustment set)
 - Sweep System $\pm 2\%$: Frequency Modulation (adjustment set).
 - Ext control: ultrasonic ON/OFF by contact.

WE OFFER OUR CUSTOMERS A WIDE RANGE OF ULTRASONIC GENERATORS. DEPENDING ON THE APPLICATION, MATERIAL OF THE PARTS AND DIRT TO BE REMOVED, TIERRATECH® WILL ALWAYS RECOMMEND THE MOST APPROPRIATE GENERATOR. FROM SINGLE FREQUENCY 28/40KHZ UNITS WITH SWEEP SYSTEM $\pm 2\%$ TO THE LATEST GENERATION GENERATORS MODELS SB-2K-D AND SB-2K-L FULLY DIGITAL AND BURST FREQUENCY SYSTEM AND MULTITECH.

SETS OF ULTRASONIC EMITTERS AND GENERATORS

AT TIERRATECH® WE HAVE A WIDE RANGE OF ULTRASONIC EMITTERS IN STANDARD MEASUREMENTS.

FOR CUSTOMIZED APPLICATIONS, WE DESIGN THE EMITTER ACCORDING TO THE NEEDS AND CLEANING REQUIREMENTS OF THE CLIENT, WITH MULTIPLE OPTIONS, MEASUREMENTS AND DIFFERENT ANCHORING SYSTEMS.

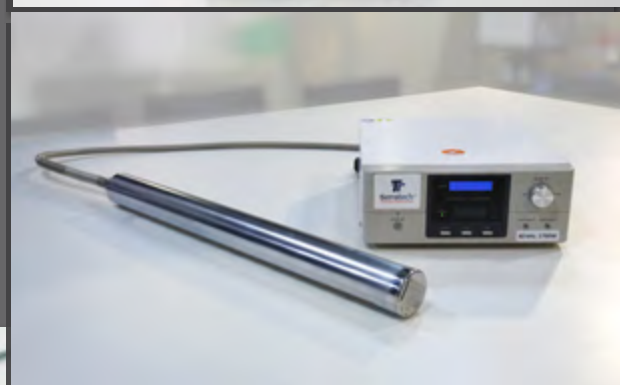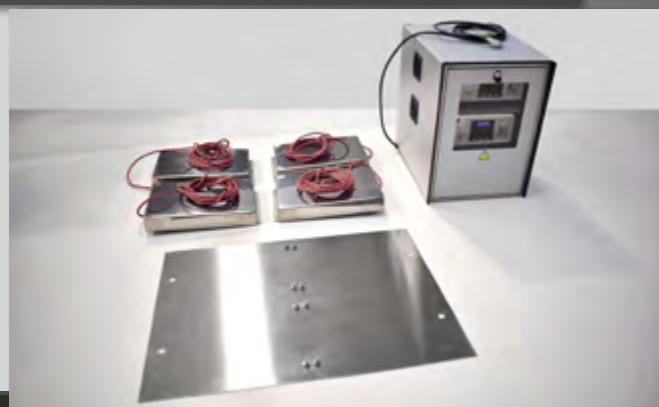

DEPENDING ON THE APPLICATION, THE GRIME, AND THE MATERIAL THAT MAKES UP THE COMPONENTS TO BE CLEANED, TIERRATECH® WILL ALWAYS GIVE YOU THE MOST APPROPRIATE SOLUTION. CONSULT WITH OUR TECHNICAL DEPARTMENT.


STANDARD DIMENSIONS	POWER
550x350x70 mm	1500W / 1700W / 2000W
450x450x70 mm	
700x300x70 mm	
450x250x70 mm	600W / 1000W

EMITTERS HIGH FREQUENCY	POWER / FREQUENCIES
	from 600 to 1700 W / 28 kHz
	from 600 to 1700 W / 40 kHz
	from 600 to 1700 W / 40-90kHz Multifrequency
	from 600 to 1000 W / 80 kHz
	from 600 to 1000 W / 105 kHz

CLEANING PRODUCTS

Do you need to remove oil or grease? Remove welding residue? Remove calcium deposits?

Depending on the material that makes up the component to be cleaned, whether grime, or grease that needs to be removed, the appropriate cleaning agent is added to the base tank respectively.

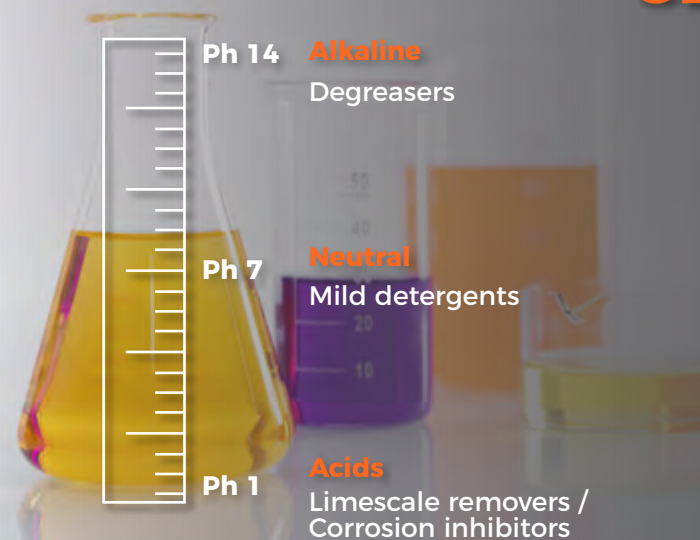

ACIDS

- Acid sanitizing cleaner
- Food industry, hotel industry
- Descaling of limescale due to water hardness
- Rust remover/descaler for ferrous metals, steel, brass, sheet metal, etc. (depends on the type of metal)
- May attack certain coatings (chrome, nickel plating)
- Descaler
- Stripper for stainless steel and very high alloy steels

- ULTRASONIC - 251
- ULTRASONIC - 250
- ULTRASONIC - 550
- ULTRASONIC - 300
- ULTRASONIC - FLU
- NEUTRALIZADOR FO
- ULTRASONIC - 2513
- ULTRASONIC - AINOX
- ULTRASONIC - PRO
- ULTRASONIC - 350
- ALIQUAT
- ALIQUAT OXO
- ULTRASONIC-41
- ULTRASONIC-41 ADT

ALKALINE

- Degreaser
- Degreasing and descaling degreaser
- Removal of grease, oil and stubborn dirt deposits
- Degreasing and descaling degreaser
- Removal of grease, oil and stubborn dirt deposits
- Paint, enamels, varnishes, primers, inks, synthetic resins, paint stripper

- ULTRASONIC - 23
- ULTRASONIC - 22
- ULTRASONIC - 20
- ULTRASONIC - 52
- ULTRASONIC FORZA-N2
- ULTRASONIC-23 L
- ULTRASONIC-24
- ULTRASONIC-26
- ULTRASONIC-MP
- ALI COMPLET
- ULTRASONIC-5P
- ULTRASONIC-20 A
- ULTRASONIC-7 W
- ULTRASONIC-17
- ULTRASONIC-2
- ULTRASONIC-4 A
- ULTRASONIC-4
- ALIQUAT N
- ULTRASONIC-70
- ULTRASONIC-MX
- ULTRASONIC-7

STRIPPER

- Hot paint stripper, synthetic resins, primers, baked paints, powder paints, water-based paints, cataphoresis and anaphoresis paints
- Can be applied on ferrous base, aluminum and light alloys (depending on alkalinity)

- ULTRASONIC - 54
- ULTRASONIC - 53
- ULTRASONIC - 51
- ULTRASONIC - 101
- ULTRASONIC - D100W
- ULTRASONIC - 54
- ULTRASONIC - 51 N
- ULTRASONIC - 57
- ULTRASONIC - DECAP
- ULTRASONIC - 6

NEUTRALS

- ULTRASONIC - ELECTRO
- ULTRASONIC - MX
- ULTRASONIC - NE-W
- ULTRASONIC - 6

SURFACTANTS

- ULTRASONIC - A
- ULTRASONIC - B
- ULTRASONIC - TENSO

OTHERS

- ULTRASONIC - HIDRO
- ANTIOXIDANTE
- ULTRASONIC - LC
- ULTRASONIC - AR
- ULTRASONIC - BIO
- ANTIESPUMANTE
- ADITIVO SECANTE
- ADISEC
- NEUTRALIZADOR-FO



*Always check the properties of each TierraTech® cleaning product before using it.





Follow us!



ULTRASONIC CLEANING SYSTEMS

tierratech.com

**6001 S 35th St. Suite D
McAllen, TEXAS. 78503
USA**

Tel. +1 (956) 584-2277

sales@tierratech.com