# TT - 50G GRAPHIC INDUSTRY

## 6.6 GALLONS




### ELECTRICAL CHARACTERISTICS


- Power Supply: 240V
- Heating element: 2x450W

### ULTRASONIC CHARACTERISTICS

- Ultrasonic power: 800W (1600W p-p)
- 1 ultrasonic generator with an output power of 800W (1600W p-p)
- Working frequency: 40 KHz sweep system ± 2%
- 16 high-performance IBL piezo-electric transducers in titanium steel

### CONTROL PANEL

- Main breaker
- DEGAS system to degas water
- Ultrasounds timer
- Temperature selector
- Power level selector: 50% - 100%

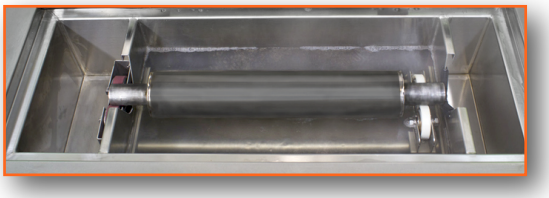

### FINISH AND ACCESORIES

- Tank made of 0.07" in thick stainless stell AISI 304
- External panel in 0.03" in thick fingerprint resistant steel
- 0.78" in thick thermo-acoustic insulation
- Rolling System: Support that allows to rotate the roller in a continuous way with 7.2W AC synchronous motor
- 1" drain ball valve
- Height-adjustable silentblock legs
- Tank cover in stainless steel with pneumatic shock absorber
- Air blow gun for drying the parts

### TECHNICAL DATA

- Capacity: 6.6 Gallons
- Internal dimensions: 39.3 x 7.87" x 7.48" in
- External dimensions: 51.2" x 15.7" x 36" in
- Weight: 74.5 Lb
- Maximum diameter of the roller in the area to be cleaned: Ø 5.9" in
- Minimum diameter of the roller in the area to be cleaned: Ø 2.36" in
- Minimum length of the area to be cleaned from the roller: 3.93" in
- Maximum length of the area to be cleaned from the roller: 38.97" in
- Maximum distance between roller supports: 40.5" in

WARRANTY AND PRODUCT QUALITY: All equipments supplied by TierraTech®, are supplied with an instruction manual in English according to the European legislation on CE marking. The equipments comply the directives on electromagnetic compatibility and electrical safety: Directive 2004/108/EC and Directive 2006/95/ECThe equipments have 2 years warranty against manufacturing defects.

**Tierra Tech S.L.**
Pque. Emp. Morero, nave 27. Guarnizo - Cantabria (SPAIN)
Tel (+34) 942 26 95 43 • Fax (+34) 942 26 95 44 • tierratech@tierratech.com · www.tierratech.com